


# FR701® 2100

## Panel Acoustic

 Eggshell 144	 Quartz 380	 Sunshine 797	 Dune 749	 Verte Papier 561	 White 224	 Wheat 130	 Pearl 481	 Light Moss 754	 Leaf 755	 Coin 794	 Opal 394	 Bone 748	 Desert Sand 758	 Earth 792	 Stream 757	 Blue Papier 539	 Silver Papier 538	 Buff 460	 Apricot Neutral 404	 Moleskin 796	 Aquamarine 381	 Blue Neutral 401	 Silver Neutral 406	 Straw 747	 Pumice 423	 Chocolate 793	 Blue Spruce 467	 Crystal Blue 175	 Cement Mix 750	 Vanilla Neutral 403	 Bronze 545	 Lavender Neutral 405	 Eucalyptus 468	 Bayberry 486	 Steel Grey 471	 Terra 751	 Sienna 475	 Lilac 752	 Green Neutral 402	 Wedgewood 150	 Grey Mix 238	 Cherry Neutral 400	 Red 799	 Violet 753	 Lake 756	 Cobalt 420	 Flannel 795	 Cinnabar 422	 Claret Accent 418	 Amethyst 424	 Chrome Green 549	 Baltic 153	 Medium Grey 298	 Rose Quartz 390	 Deep Burgundy 556	 Iris 798	 Ultramarine 470	 Blue Plum 553	 Black 408
---	---	---	---	--	--	--	--	---	---	--	---	---	--	--	---	---	--	---	--	---	---	--	---	--	---	--	--	--	---	--	---	---	---	--	---	--	---	--	--	---	---	---	--	---	---	--	--	---	--	---	---	--	--	---	---	--	---	--	---

# FR701® 2100

Panel  
Acoustic

## Specifications

**Content**  
100% post-consumer recycled polyester

**Weight**  
16.0 ± 0.5 oz./lin. yd.


**Width**  
66" min. useable


**Repeat**  
none


## Cleaning Code


Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

## Performance

 **Colorfastness to Light (AATCC 16 Option 3)**  
Grade 4 min. at 40 hours

 **Colorfastness to Crocking (AATCC 8)**  
Grade 4 min. dry & Grade 3 min. wet


 **Breaking Strength (ASTM D5034)**  
150 lbf min. warp and fill

 **Flammability (ASTM E84)**  
Class I or A

\*ACT® registered construction marks.

## Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

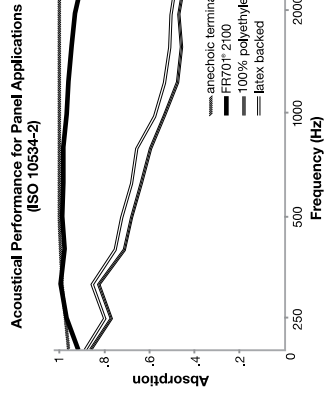

**NRC of anechoic termination**  
1.00

**NRC of fabric in front of anechoic termination**  
.95

## Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots. This is a non-directional fabric.

Proudly woven in the USA supporting our local communities.

Visit [guilfordmaine.com](http://guilfordmaine.com) for samples.



Recycled is a registered trademark of The Recycled, Inc. and designates fabrics that are made from 100% recycled or comparable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

## Guilford of Maine

[guilfordmaine.com](http://guilfordmaine.com)  
800 544 0200 Customer Care  
616 554 2235 Fax

04/16